



STANDARD



OPTIONAL



Momento statico massimo al perno torretta

Max. static moment at the turret pin
Moment statique max. a l'axe de la tourelle
Max. statisches ubmoment am kransaulenbolzen
daN*m (lb*ft)

14000 (101281)

Coppia di rotazione

Slew torque
Moment de rotation
Drehmoment
daN*m (lb*ft)

870 (6294)

Uscita stabilizzatori

Outriggers extension
Sortie de bequilles
Breite der Abstutzung
mm (ft)

1400+1300 (4' 7" + 4' 3")

Larghezza stabilizzatori

Outriggers width
Largeur des bequilles
Gesamtbreite der Abstutzung
mm (ft)

4850 (15' 11")

Pressione


Pressure
Pression
Druck
bar (psi)

295 (4149)

Capacità serbatoio olio

Oil tank capacity
Capacité du réservoir de l'huile
Öl tank inhalt
L (us gal)

57 (15)

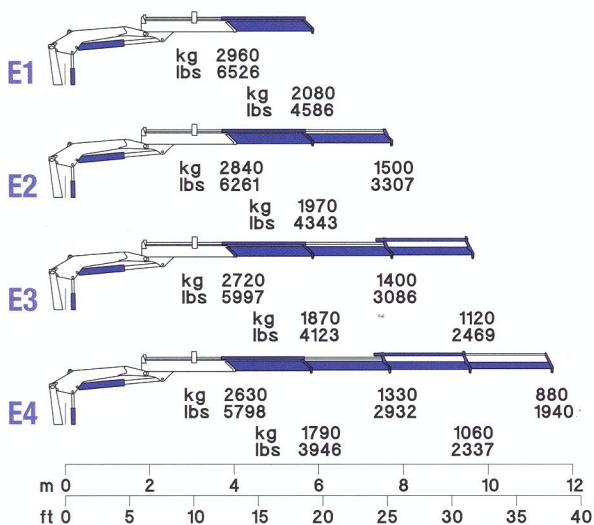

	E1	E2	E3	E4
Sbraccio idraulico / Hydraulic boom length / Longueur du bras hydraulique / Hydraulic reichweite	m (ft) 5.84 (19' 2")	7.69 (25' 3")	9.58 (31' 5")	11.51 (37' 9")
Lunghezza / Length / Longueur / Gesamtbreite	mm (ft) 793 (2' 7")	793 (2' 7")	793 (2' 7")	793 (2' 7")
Larghezza / Width / Largeur / Breite	mm (ft) 2405 (7' 11")	2405 (7' 11")	2405 (7' 11")	2405 (7' 11")
Altezza / Height / Hauteur / Höhe	mm (ft) 2160 (7' 1")	2160 (7' 1")	2160 (7' 1")	2160 (7' 1")
Peso (senza olio e montaggio) / Weight (without oil and fitting) Poids (sans huile et montage) / Gewicht (ohne Öl und ohne)	Kg (lbs) 1525 (3362)	1640 (3616)	1745 (3847)	1835 (4046)